


RI360P1-QR14-ELIU5X2-0.3-RS5

Miniature Encoder – With Analog Output



Premium Line

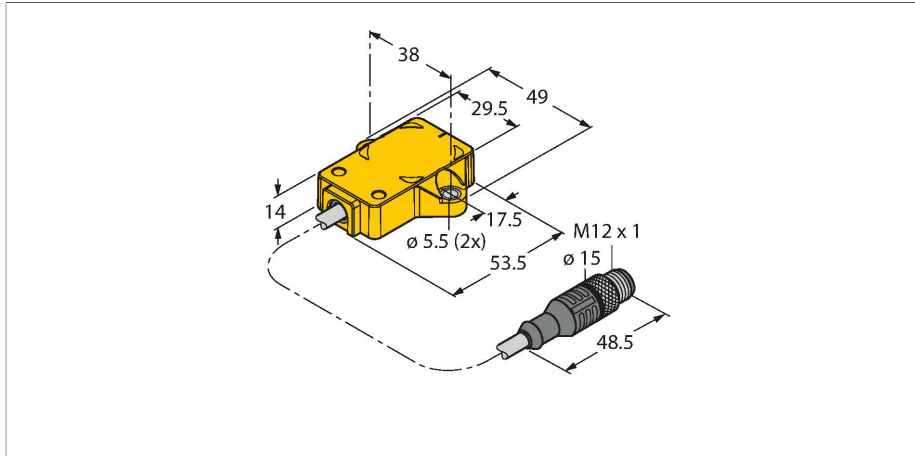

Features


- Rectangular, plastic
- Many mounting possibilities
- P1-Ri-QR14 included in delivery
- Measuring range displayed via LED
- Immune to electromagnetic interference
- Resolution, 12-bit
- 15...30 VDC
- Analog output
- Programmable measuring range
- 0...10 V and 4...20 mA
- Cable with male connector, M12 × 1

Wiring diagram

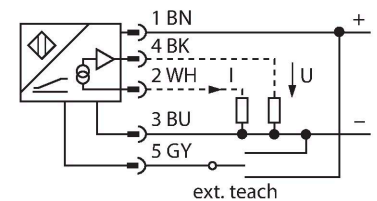

Functional principle

The measuring principle of inductive angle sensors is based on oscillation circuit coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the angle of the positioning element. The rugged sensors are wear and maintenance-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.

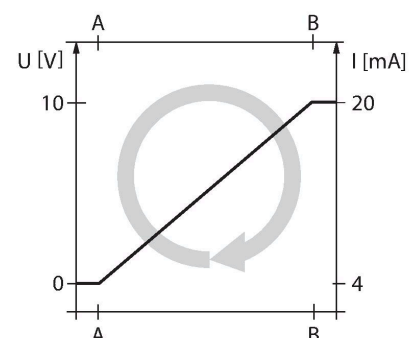

Technical data


Type	RI360P1-QR14-ELIU5X2-0.3-RS5
ID	1590854
Measuring principle	Inductive
General data	
Starting torque shaft load (radial / axial)	Not applicable because of contactless measuring principle
Resolution	0.09°
Measuring range	0...360°
Nominal distance	1.5 mm
Repeat accuracy	≤ 0.025 % of full scale
Linearity deviation	≤ 0.3 % f.s.
Temperature drift	≤ ± 0.01 %/K
Output type	Absolute singleturn
Electrical data	
Operating voltage U_B	15...30 VDC
Ripple U_{ss}	≤ 10 % U_{Bmax}
Isolation test voltage	0.5 kV
Short-circuit protection	yes
Wire break/reverse polarity protection	yes/yes (voltage supply)
Output function	5-pin, Analog output
Voltage output	0...10 V
Current output	4...20 mA
Load resistance voltage output	≥ 4.7 kΩ
Load resistance current output	≤ 0.4 kΩ
Sample rate	800 Hz
Current consumption	< 50 mA

Technical data

Mechanical data	
Design	Rectangular, QR14
Dimensions	53.5 x 49 x 14 mm
Flange type	Flange without mounting element
Shaft Type	Blind hole shaft
Shaft diameter D (mm)	6 6.35
Housing material	Plastic, PBT-GF30-V0
Electrical connection	Cable with connector, M12 × 1
Cable quality	Ø 5.2 mm, Black, LifYY, PVC, 0.3 m
Core cross-section	5 x 0.25 mm ²
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Vibration resistance (EN 60068-2-6)	20 g; 10...3000 Hz; 50 cycles; 3 axes
Shock resistance (EN 60068-2-27)	100 g; 11 ms ½ sine; 3 × each; 3 axes
Continuous shock resistance (EN 60068-2-29)	40 g; 6 ms ½ sine; 4000 × each; 3 axes
Salt spray test (EN 60068-2-52)	Severity degree 5 (4 test cycles)
Protection class	IP68 IP69K
MTTF	138 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Measuring range display	multifunction LED, green green flashing
Included in delivery	positioning element P1-Ri-QR14; for technical details see data sheet

Mounting instructions

Mounting instructions/Description

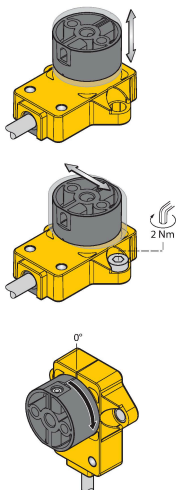


Adapter pins provide more flexibility
 Extensive range of mounting accessories
 for easy adaptation
 to many different shaft diameters.
 LED function
 Operating voltage
 Green: Voltage is present
 Displayed measuring range
 Green: Positioning element is within the
 detection range
 Flashing green: Positioning element is within
 the
 measuring range with reduced signal quality
 (e.g.
 the distance is too great)
 Off: Positioning element is outside the
 sensing range
 Functional safety thanks to the inductive
 measuring principle
 The measuring principle of RLC coupling


makes the sensor absolutely wear-free and immune to magnetized ferrous chips and other interference fields. Owing to the differential analysis, the output signal remains almost unchanged, even if the position of the positioning element deviates from the ideal axis of rotation. The distance between the sensor and the positioning element

Accessories


P1-RI-QR14 1590812
Positioning element for angle sensors RI-QR14, for Ø 6 mm shafts




P2-RI-QR14 1590819
Positioning element for angle sensors RI-QR14, for Ø 6.35 mm shafts




P3-RI-QR14 1590865
Positioning element for angle sensors RI-QR14, flat design, using shield plate SP1-QR14 is recommended




SP1-QR14 1590873
Shield plate Ø 30 mm, aluminium




HSA-M6-QR14 6901051
Adapter for RI-QR14 specific positioning elements, hollow on solid shaft, Ø 6 mm



HSA-M8-QR14 6901052
Adapter for RI-QR14 specific positioning elements, hollow on solid shaft, Ø 8 mm



DS-RI-QR14 1590814
Spacer sleeves for rear mounting of RI-QR14, 2 pcs. per bag



Accessories

Dimension drawing	Type	ID	
	TX1-Q20L60	6967114	Teach adapter for inductive encoders, linear position, angle, ultrasonic and capacitive sensors