


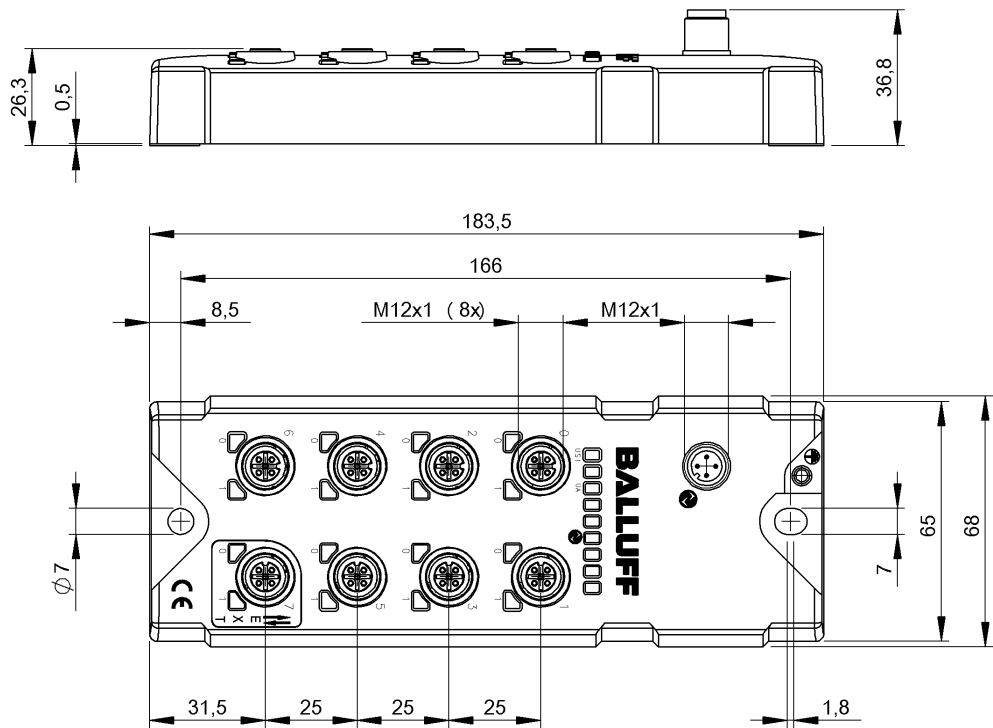

Basic features

Approval/Conformity	CE UKCA cULus WEEE
Scope of delivery	Part label (10x) Port cover M12 (4x) Grounding strap Lock washer Short guide M4x6 screw
Style	Two-row

Display/Operation

Actuator supply UA, indicator	Green LED
IO-Link communication indicator	Green LED
Module supply indicator	Green LED
Sensor supply US indicator	Green LED
Switching function display	LED yellow

Electrical connection

Connection (COM 1)	M12x1-Male, 4-pin, A-coded
Connection slots	8x M12x1-Female, 5-pin, A-coded
Contact, surface protection	nickel plated 2 µm/gold plated 0.4 µm

Electrical data

Configurable inputs/outputs	no
Current consumption without load, max.	40 mA
Current sum US, sensor	3.5 A
IO-Link function	Device
IO-Link ports, number	1
Operating voltage Ub	18...30.2 VDC
Rated operating voltage Ue DC	24 V

I/O modules
BNI IOL-104-S02-R012
Order Code: BNI0090

BALLUFF

Environmental conditions

Ambient temperature	-5...70 °C
Ambient temperature UL max.	50 °C
EN 60068-2-6, Vibration	61...500 Hz, constant acceleration 15 g 5...61 Hz, constant amplitude 1 mm
IP rating	IP67, when threaded in
Storage temperature	-25...70 °C

Functional safety

MTTF (40 °C)	75 a
--------------	------

IO-Link

IO-Link Profil IDs	N/A
--------------------	-----

Interface

Cycle time min.	4.5 ms
Digital inputs	16x PNP, Type 3
Extension port	yes
IO-Link version	1.1
Interface	IO-Link 1.1
Process data IN	4 bytes
Process data cycle min.	4.5 ms
Single-channel monitoring	yes
Transfer rate	COM2 (38.4 kBaud)

Material

Gasket, material	FKM 75
Housing material	PBT, GF30 1.4404 stainless steel, Inserts
Housing shield	no

Mechanical data

Dimension	68 x 38.3 x 183.5 mm
Mounting ground strap	M4 internal thread
Mounting part	2-hole screw mount
Weight	500 g


Remarks

See short guide


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



I/O ports
PIN 1: +24V
PIN 2: Input/Output 2
PIN 3: GND
PIN 4: Input/Output 1
PIN 5: Function ground



IO-Link
PIN 1: +24V
PIN 2: n.c.
PIN 3: GND
PIN 4: C/Q, IO-Link DC-Channel